



★ SINCE 1947 ★

# DEKS

## DRAINAGE

BY DESIGN



## OUR VISION

Our vision is to provide innovative product solutions by design and delight our customers with operational excellence at every step, ensuring we are their preferred and trusted partner of choice, helping them succeed.

## OUR MISSION


DEKS' customer focus helps our customers find the right 'fit and forget' solution by design to solve their problems. We leverage our global manufacturing capability to design, develop and deliver solution oriented construction products, for the wholesaler, contractor and manufacturer to maximise their success.



# CONTENTS

---

- 5 **DEKDRAIN** Threshold
- 6 - 7 **DEKDRAIN** A15
- 8 - 9 **DEKDRAIN** Edge - A15 / B125
- 10 - 13 **DEKDRAIN** EEZEE - B125 & C250
- 14 - 15 **VALUEFLEX** EPVC Couplings
- 16 Universal Rainwater | Waste Adaptor
- 17 - 18 **DekRock** - Grass | Gravel Grids

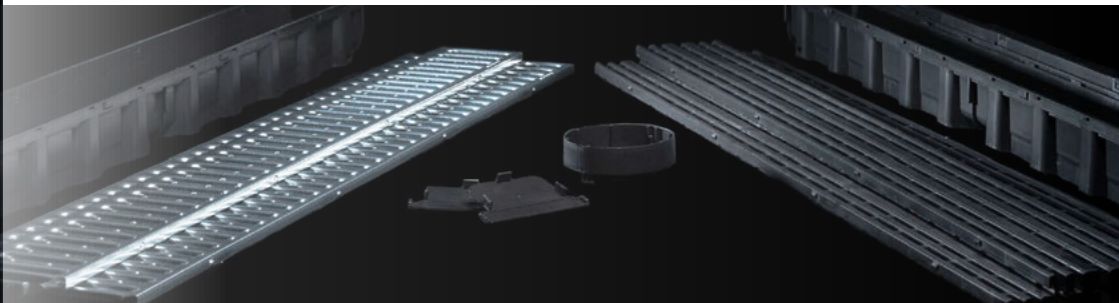

# WHY ACCEPT THE NORM?



EN1433


- Cost Effective ▪ Unique
- Game Changer ▪ Easy ▪ Stylish



A15



A15 &  
B125 EDGE

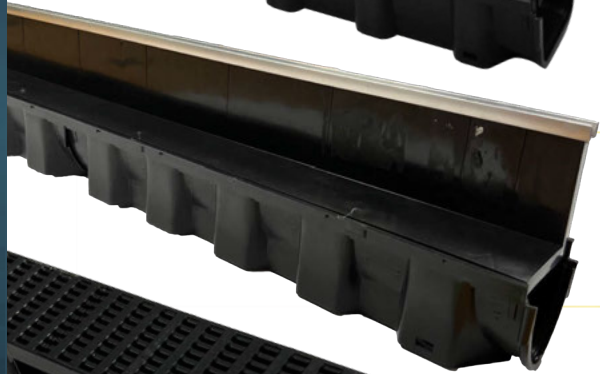

B125 EEZEE



C250 EEZEE



# DEKRAIN THRESHOLD

## SLEEK DESIGN A SUCCESSFUL SOLUTION

### Why choose DekDrain Threshold?

DekDrain Threshold is a combination of our successful A15 Linear Bar and C250 Wave grating design that offers both a sleek designer look and superior water capture, for a fabulous front door finish with lots of benefits.

Beyond its fabulous looks, is a dry weather channel that provides maximum self-cleansing and flow through by design. Wave style Heel Shield slots prevent any shoe type from trapping. The grating is easily removable with the clip-in system. A sleek compact access box/corner quad can also be used for directional changes as well as for cleaning when required.

DekDrain Threshold is packaged in a kit containing:

- 1 x Channel and A15 grating
- 1 x Corner quad
- 2 x End caps
- 1 x Bottom clip in connector



PRODUCT CODE	RATING	GRATING STYLE	WIDTH	CHANNEL DEPTH	LENGTH
DCD-T-HWT	A15	Wave	114mm	78mm	1000mm



**Dry Weather Channel**  
Self cleansing and less maintenance

**Wave Design Grating**

Stylish and great performance

**Compact Height**

Less excavation and quicker installation

**Fully PP Channel**

Light weight, easy to handle, fewer damages onsite or during transport



# DEKDRAIN A15

## CHANNEL DRAINAGE THAT MAKES SENSE

### A Striking Design In Our Plastic Channel Drainage

DekDrain A15 Plastic Channel Drainage features a new engineered design in channel drain. Due to its plastic linear bar grating design, water flow is disrupted and protects against traversing water, unlike traditional gratings. Measuring 78mm in depth, its perfect for your paving projects. Also featuring the new push fit, clip in bottom outlet

which makes for simple, quick, user-friendly assembly. Each channel measures 1000mm, with a cutting and jointing point at 500mm for applications that require a shorter length. Connect (with an accessory bag) to 110mm plastic pipe with an outlet junction located at either end of the channel for ease of use.

Certified to BS EN 1433, DekDrain is a high quality, yet cost effective solution for stylish surface drainage. Also available in traditional slotted galvanised grating.

Find out more at [www.deks.co.uk/a15](http://www.deks.co.uk/a15)



scan me



**78mm  
Channel Depth**

Ideal for all paving projects

**2 Point  
Bottom Outlet  
Positioning**

Outlet located at either end to 110mm

**1.5 tonnes**

A15 - Designed for maximum weight of 1.5 tonnes

## CHANNEL LENGTHS 1000 x 78mm



A15 channel drain 1000mm (L) x 114mm (W) x 78mm (H), available in new linear bar design plastic grating or slotted galvanised steel grating.

PRODUCT CODE	DESCRIPTION	MATERIAL
DCD-1M-GS-M	DekDrain A15 HDPE Channel Galvanised Grate 1m	Galvanised / Plastic
DCD-1M-PL-M	DekDrain A15 HDPE Channel Plastic Grate 1m	Plastic / Plastic

## CORNER QUADS Are Connectable



Connect your DekDrain in up to four different directions or change direction with a corner quad. Available to match both plastic and galvanised grating styles.

PRODUCT CODE	DESCRIPTION	MATERIAL
DCD-CQ-GS-M	DekDrain A15 Corner Quad with Galvanised Grate	Galvanised / Plastic
DCD-CQ-PL-M	DekDrain A15 Corner Quad with Plastic Grate	Plastic / Plastic

## ACCESSORY Bag



The accessory bag contains 1 x outlet connector and 2 x end caps. Use the end caps to close off the ends of the channel drainage. The outlet connector simply clips into place on the bottom of the channel and connects to 110mm plastic pipe.

PRODUCT CODE	DESCRIPTION	MATERIAL
DCD-AS-M	DekDrain A15 Accessory Bag (2 x End Caps, 1 x Bottom Outlet Connector)	Plastic

## GARAGE PACK Channels



For perfect garage drainage, use a garage pack. Everything you need to provide stylish surface drainage for your garage. Includes 3 x 1000mm x 78mm channels and an accessory bag.

PRODUCT CODE	DESCRIPTION	MATERIAL
DCD-GP-GS	DekDrain A15 Garage Pack (3 x Channel with Galv Grate + Accessory Bag)	Galvanised / Plastic
DCD-GP-PL	DekDrain A15 Garage Pack (3 x Channel with Plastic Grate + Accessory Bag)	Plastic / Plastic



# DEKDRAIN EDGE

## CUTTING EDGE FINISH RATED UP TO B125

### Why choose DekDrain Edge?

**DekDrain Edge Aluminium 'slot' drain is market leading.**

**Add a cutting edge finish to your drainage design, with a clean stylish look.**

In a tremendous leap forward, DEKS are bringing a cost effective Metal Edge Slot Drain to the domestic patio and driveway market. For use as an A15 or B125 drain.

DekDrain Edge offers a unique and envied look to the finish, where it matters, (previously only available in more expensive full steel products). Each slot wall is capped with a fabulous looking square faced, visible, non-rusting, polished aluminium edge.

Additionally, Edge is a fabulous substitute for use as a Threshold Drain, finishing off the connect between hard landscaping and property.

The 87mm upstand ensures the paving has enough space for a securing bed of mortar to fix and forget, with no need to trim the back edge off pavers.

Featuring an overall height of just 174mm (<2 brick courses), Edge will sit above the concrete slab with ease. Excavation time is optimised to offer you savings on installation.

Designed with an ovoid shape, creating a dry weather channel. This ensures water flows better, acting as a self-cleansing agent to the last drop, reducing maintenance, risk of blockages and cleaning.

Use of the stylish access quad-box gives you discreet access for washing out silt when necessary.



scan me

EN1433 Rated

**Narrow Slot  
Aluminium Edge**

Strong, stylish  
and rust proof

**Compact  
Height & 82mm  
Upstand**

No need to cut  
paving, less  
excavation

**Dry Weather  
Channel**

Self cleansing and  
less maintenance



## DEKDRAIN EDGE Slot Drain A15 & B125



Measuring 1000mm (L) x 174mm (H) x 98mm (W) with an 87mm upstand for easy laying.  
Rated for use up-to B125.

PRODUCT CODE	DESCRIPTION
DCD-SD-M	DekDrain Slot Drain Metal Edge

## DEKDRAIN EDGE Corner Quad



• Quad features elegant surface grating • Quad provides an access point - easy cleaning  
• Use Quad for directional changes • No screws needed - easy connection to drain pipe • Rated for use up to A15

PRODUCT CODE	DESCRIPTION
DCD-SD-CQ	DekDrain Slot Drain Corner Quad

## DEKDRAIN EDGE Accessories



• Clip in connections - quick fitting • Outlet connects to 110mm pipe

PRODUCT CODE	DESCRIPTION
DCD-SD-AS	DekDrain Slot Drain Accessory Bag (2 x end cap, 1 x outlet)

For more information visit [www.deks.co.uk/edge](http://www.deks.co.uk/edge)

technical information

installation instructions

how-to videos



# DEKDRAIN EEZEE

## EEZEE OPTION WITH COLOSSAL ADVANTAGES

### DekDrain Eezee comes complete and hassle free

Featuring 6 cut points, enabling end to end interlocking stability on runs with cuts.

Easily create a socket/spigot channel with no butted joints at 300 / 400 / 600 / 700 & 800mm lengths. Cutting to 500mm leaves an end butt joint. Cuts between 300 - 500mm and 800 - 1000mm will allow full grating lockdown.

Eezee channel provides you with 12 drain connection points alongside the ability to interlock in 8 directions, creating crosses, tees, and staggered runs without additional fittings.

Save money and time. Get the job done faster with less components.

HDPE is silky smooth for self-cleansing and reduced silt build up which reduces maintenance costs and cleaning.

A relatively lightweight yet strong material provides a robust channel which is less prone to transit or onsite breakages, reducing downtime.

#### Grid & Wave Design Grating

Stylish and great performance

#### 12 Outlet Options

Easily connect to underground drainage

#### Easy & Clean to Cut vs Concrete

No heavy machinery - No dust clouds

#### Easy to Order & Available in

B125 & C250 weight classes

#### PP Channel, PVC & Ductile Iron Grating

Light weight, easy to handle, fewer damages



scan me


## DEKDRAIN Eezee



Available in both B125 and C250 options to suit the scheme.  
The channel measures 1000mm (L) x 131mm (W) x 98mm (H).

- Each 500mm grating is secured by a bolt and locking bar
- Easily create a 90-degree tee or elbow with no corner quads
- Flexible outlet connections - 12 outlet options to best suit your installation
- No additional fittings needed - Eezee saves money
- Certified EN1433

### GRATING STYLES



#### EEZEE B125 GRID

- All plastic super strong, slip proof, narrow slot grid profile grating with massive benefits on installation
- HDPE Channel PVC Grid Grating
- B125 is certified for use on driveways, car parks, pedestrian areas, pathways



#### EEZEE C250 WAVE

- Up-style your drainage scheme with our fantastic wave linear grating! "Super Sleek styling - Amazing Water Capture"
- HDPE Channel with Ductile Iron Grating
- C250 is certified for use on driveways, pedestrian areas, pathways, lightly trafficked roads & kerbside small private car parks, light goods areas

### NO CORNER QUADS REQUIRED

Each Eezee length features three connection points on each side of the channel body, as well as connection points at either end of the channel.

Easily create the channel layout that you need to complete the job. Simply remove the blanking cap on the connection point you are using and connect the next length of channel by slotting it into place. The connection securely holds in place during installation.



PRODUCT CODE	RATING	GRATING STYLE	WIDTH	CHANNEL DEPTH	LENGTH
DCD-EZ-98-B125-G/B	B125	Grid	131mm	98mm	1000mm
DCD-EZ-98-C250-W/B	C250	Wave	131mm	98mm	1000mm

# DEKDRAIN EEZEE OUTLETS

## If you like choice, you'll love DekDrain Eezee

A single length has 12 outlet options and 11 outlet points. All of these options are created from only three additional connections. DCD-EZ-98-SPEC outlet end cap can also double as a blanking off end caps.

### SOCKET END

To connect from the socket to a 50mm pipe use DCD-EZ-98-SOEC or DCD-EZ-98-SOOO to connect to a 100mm drainage

### 6 SIDE OUTLETS

Use DCD-EZ-98-SPEC to connect from these outlets to a 50mm pipe (also use to connect to another channel)

### SPIGOT END

To connect from the spigot connection to a 50mm pipe use DCD-EZ-98-SPEC

### 3 BOTTOM OUTLETS

Connect directly to 100mm underground drainage fitting (spigot end)

End Spigot Outlet 50mm

1

Side Outlet 50mm

2

End Socket Outlet 50mm

3

End Socket Outlet 110mm

4

PRODUCT CODE	DESCRIPTION
DCD-EZ-98-SOEC	Socket End Cap for Eezee Channel Black C/W 50mm Outlet Option
DCD-EZ-98-SOOO	Socket Offset Outlet to 110mm for Eezee Channel Black
DCD-EZ-98-SPEC	Spigot End Cap for Eezee Channel Black C/W 50mm Outlet Option

## DEKDRAIN EEZEE SILT BOX

Used to keep the channel drainage free of silt or dirt, maintaining the ability for the water to continue flowing freely and efficiently.

DekDrain Eezee silt box comes complete with a silt basket.

Measures 500mm (L) x 131mm (W) x 280mm (D).

Features one 110mm outlet connector on each side.



PRODUCT CODE	RATING	GRATING STYLE	WIDTH	CHANNEL DEPTH	LENGTH
DCD-EZ-SB98-B125-G/B	B125	Grid	131mm	280mm	500mm
DCD-EZ-SB98-C250-W/B	C250	Wave	131mm	280mm	500mm

## DekDrain EEZEE Outlet Connector



\* Illustration purposes only  
- does not include end cap

Used to connect from Eezee 2" outlet end caps to 4" underground drainage pipe. The outlet connector is rotational in any direction as well as adjustable from 0-90 degrees.

PRODUCT CODE	DESCRIPTION
DCD-EZ-OC	DekDrain Eezee 2-4" Universal Variable Connector

### USEFUL INFORMATION FOR EEZEE



KEY MEASUREMENTS



OUTLET CONNECTOR GUIDE



EEZEE INSTALLATION GUIDE



## OUR VALUE DISCIPLINES

### PRODUCT LEADERSHIP

DEKS aims to lead the charge in product development. We focus on investment and research in order to develop products that not only lead the market but also remain well ahead of any competition.

### OPERATIONAL EXCELLENCE

DEKS aims to lead the market through price and convenience. The goal is not to simply be the cheapest but truly create an environment for the customer where efficiency is maximised, and friction is minimised or completely eradicated.

### CUSTOMER INTIMACY

DEKS is obsessed with understanding the individual customer detail. We aim to excel in customer service and customer attention. Customer intimacy goes beyond understanding our customers' needs and wants. It means having a full range of services available to help serve our customers on demand.

# EPVC COUPLINGS



## ELBOWS & TEES



- Collapsible fittings for tricky plumbing applications



## COUPLINGS

- Connects pipes that are the same in diameter
- Connects pipes that are two different diameters

## END CAPS

- Provide secure air and water tight seals



## VALUEFLEX EPVC Adaptor Couplings



Adaptors will connect two pipes of different diameters.

PRODUCT CODE	DESCRIPTION	PIPE OD RANGE
DACE-44-37	ValueFlex 1.5" x 1.25"	44-36mm to 37-29mm
DACE-57-37	ValueFlex 2" x 1.25"	57-49mm to 37-29mm
DACE-57-44	ValueFlex 2" x 1.5"	57-45mm to 44-36mm
DACE-60-48	ValueFlex 2.5" x 1.5"	60-48mm to 48-40mm
DACE-77-48	ValueFlex 3" x 1.5"	77-60mm to 48-40mm
DACE-89-48	ValueFlex 3" x 1.5"	89-75mm to 48-40mm
DACE-89-60	ValueFlex 3" x 2"	89-75mm to 60-48mm
DACE-111-48	ValueFlex 4" x 1.5"	111-100mm to 48-40mm
DACE-112-60	ValueFlex 4" x 2"	112-100mm to 60-48mm
DACE-114-89	ValueFlex 4" x 3"	114-97mm to 89-75mm
DACE-120-114	ValueFlex 4" AC to 4" CI/PVC	120-108mm to 114-97mm
DACE-122-48	ValueFlex 5" x 1.5"	122-115mm to 48-40mm
DACE-133-89	ValueFlex 4" EW to 3" CI/PVC	133-121mm to 89-74mm
DACE-4000	ValueFlex 4" EW to 4" PVC	137-122mm to 114-97mm
DACE-162-114	ValueFlex 6" x 4"	162-147mm to 114-97mm
DACE-190-114	ValueFlex 6" EW to 4" CI/PVC	190-170mm to 114-97mm
DACE-190-170	ValueFlex 6" EW to 6" CI/PVC	190-170mm to 170-150mm
DACE-6000	ValueFlex 6" EW to 6" PVC	196-176mm to 162-142mm
DACE-215-162	ValueFlex 8" x 6"	215-195mm to 162-142mm

- EW = CLAY (CHECK PIPE OD)
- CI = CAST IRON
- PVC = PLASTIC
- AC = ASPBESTOS CEMENT

## VALUEFLEX EPVC Pipe Couplings



Pipe couplings will connect pipes which are similar or the same in diameter.

PRODUCT CODE	DESCRIPTION	PIPE OD RANGE
DPCE-27	ValueFlex 0.75" x 0.75" PVC	27-22mm
DPCE-34	ValueFlex 1" x 1" PVC	34-24mm
DPCE-37	ValueFlex 1.25" x 1.25" PVC	37-27mm
DPCE-49	ValueFlex 1.5" x 1.5"	49-41mm
DPCE-61	ValueFlex 2" x 2" PVC	61-46mm
DPCE-70	ValueFlex 2.5" x 2.5" PVC	70-55mm
DPCE-84	ValueFlex 3" x 3"	84-69mm
DPCE-92	ValueFlex 3" x 3" PVC	92-80mm
DPCE-114	ValueFlex 4" x 4" PVC	114-97mm
DPCE-127	ValueFlex 4" x 4" CI/PL	127-110mm
DPCE-142	ValueFlex 4" x 4" EW	142-122mm
DPCE-170	ValueFlex 6" x 6" PVC	170-150mm
DPCE-190	ValueFlex 6" x 6" EW	190-170mm



## VALUEFLEX EPVC Elbows and Tees

Solve tricky plumbing applications with collapsible fittings.

PRODUCT CODE	DESCRIPTION	PIPE OD RANGE
DECE-L-48	ValueFlex Elbow 1.5"	48-40mm
DECE-T-48	ValueFlex Tee 1.5"	48-40mm
DECE-L-60	ValueFlex Elbow 2" x 2"	60-48mm
DECE-T-60	ValueFlex Tee 2" x 2"	60-48mm
DECE-L-89	ValueFlex Elbow 3" x 3"	89-75mm
DECE-T-89	ValueFlex Tee 3" x 3"	89-75mm
DECE-L-114	ValueFlex Elbow 4" x 4"	114-197mm
DECE-T-114	ValueFlex Tee 4" x 4"	114-197mm



## VALUEFLEX EPVC End Caps

Provide secure air and water tight seals.

PRODUCT CODE	DESCRIPTION	PIPE OD RANGE
DECE-EC-48	Value-Flex End Cap 1.5"	48-40mm
DECE-EC-60	Value-Flex End Cap 2"	60-52mm
DECE-EC-89	Value-Flex End Cap 3"	89-75mm
DECE-EC-114	Value-Flex End Cap 4"	114-97mm
DECE-EC-140	Value-Flex End Cap 5"	140-125mm
DECE-EC-160	Value-Flex End Cap 6"	160-145mm
DECE-EC-215	Value-Flex End Cap 8"	215-195mm

## UNIVERSAL Waste Adaptor




UWA100 Accepts 22mm to 60mm (3/4" - 2") waste pipe. External waste pipes can be connected directly to a surface water drain, or depending on the design, via a gully trap to the underground drainage system. Simply cut the UWA100 to the required pipe size.

PRODUCT CODE	DESCRIPTION
UWA100	110mm Universal Waste Adaptor



- Easily cut to size to fit 22-60mm (3/4" - 2") waste pipe
- Can be used as an adaptor or stopper
- Stops construction debris from blocking drains when used as a stopper

## UNIVERSAL Rainwater Adaptor

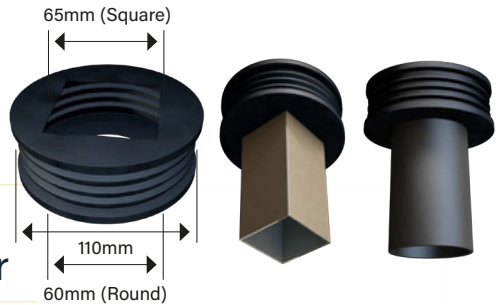


URA100 Accepts 60mm round and 65mm square down. External rainwater downpipe can be connected directly to the surface water drain or, depending on the design, via a gully trap to the underground drainage system.

PRODUCT CODE	DESCRIPTION
URA100	110mm Universal Rainwater Adaptor



- Manufactured from high quality EPDM
- Connects all 110mm round & square rainwater pipes
- Low cost universal solution
- Tidy post fix appearance

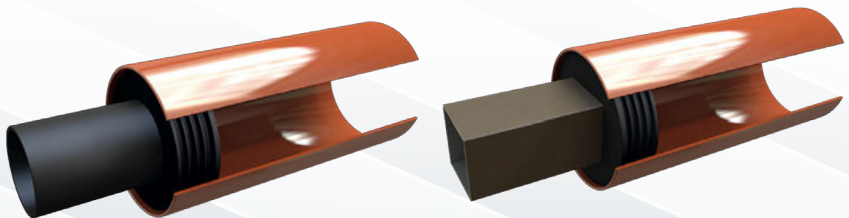



# DekRock Heavy

Permeable and landscaping ground stabilisation - Drives, Patios, Gardens, Events, Drives, Parks & Leisure Areas.

## SPECIFICATIONS

PRODUCT CODE - DCD-DRPG-B (BLACK)	
PRODUCT CODE - DCD-DRPG-G (GREEN)	
Length	493mm
Width	493mm
Height	39mm
Weight	5kg/m <sup>2</sup>
Coverage	4 Tiles/m <sup>2</sup>
Material	Recyclable PP (polypropylene)
Connection	Tongue and Groove
Colour	Black or Green
Finish	Grass or Gravel

## KEY FACTS

- 35 tonne axle load capability
- Creates a dynamic surface that will not crack pothole & self-destruct
- Solves problematic drainage issues through permeability
- Onsite SuDS compliant
- Durable, strong and long lasting
- Strong interlocking design fast installation time
- DekRock reduces the carbon footprint of a project, and it is completely recyclable

### Permeable Design

SuDS compliant - offers excellent water permeation through the surface avoiding ponding areas.

### High Strength

Built in locking tongue and groove joints clicked together offers stability when installed.

### Load Capacity

910+ tonnes/m<sup>2</sup> on a correctly specified and compacted sub-base-ISO844 certified.

### Quality Design

Strong locking connections for seamless joints do not detach or separate.

### Improved Environment

Aesthetically beneficial and practical containment of the landscape, cleaner surrounding areas.

### Application Options

Both gravel or grass filled keeps ground stabilised and looking great, with low-maintenance for future on costs.

### Stable

Made of recycled PP (polypropylene) and fully recyclable.

- DekRock
- Compacted Screeding/ Concreting Sand 50mm
- Geotextile Layer
- Compacted Stone (MOT Type 1)
- BiAxial Geogrid (optional)
- Compacted Soil/ Earth

## TECHNICAL DATA

Grid-fill Mediums	NBS Sec Q23	Angular Gravel up to 20mm
-	NBS Sec Q30	Grass Seeding/ Turfing
Sub-Base Requirements	-	Inert Stabilised Material
Max Gradient	-	12%
Max Vehicle Speed	-	15
Max Carry Load	ISO844	35 Tonne Axle Load
Estimated Rate of Installation	M <sup>2</sup> / Hr / Person	220
Colours	-	Black & Green
Void Ratio	% Open	99.2

# DekRock Gravel

Permeable Ground Stabilisation, Pathways, Drives, Patios, Gardens, Events, Parks & Leisure Areas

## KEY FACTS

- 20 tonne axle weight
- For areas where containment is the key, permanent non migrating features, creative designs and options too
- SuDS compliant, filtered draining lose the mud not the gravel
- NBS Specification support in accordance with Q23 for gravel surfacing or Q30 for seeding/ turfing
- Durable, Lightweight .95 Mtr2 square unit delivers faster install time
- Affixed Geotextile Backing reduces extra costs and laying time
- The lightweight interlocking design stops separation and creates a seamless professional finish
- Recyclability improves carbon footprint
- No need to buy and install a geotextile separately reduces waste and overlaps will not lift move or blow away during installation

## SPECIFICATIONS

PRODUCT CODE - DCD-DRSG-W (WHITE)	
Length	1152mm
Width	820mm
Height	30mm
Weight	4.14kg/m <sup>2</sup> - 9.13lbs/m <sup>2</sup>
Coverage	0.95m <sup>2</sup>
Material	100% Recyclable Plastic
Connection	M/F Peg
Colour	White
Finish	Grass or Gravel

### Permeable Design

Excellent water permeation through the surface avoiding ponding and muddy areas.

### Environmentally Friendly

100% recycled plastic and no need to constantly replace lost surface structure.

### Load Capacity

140-400 Tonnes/m<sup>2</sup> (See table) on a correctly specified and compacted sub-base-ISO844 certified.

### Cleaner Accesses

Premature deterioration causes maintenance costs, create better clean zones using DekRock Gravel saves you money.

### Quality Design

Our geotextile backed open cell pockets give stability when installed preventing movement and failures.

Each grid is connected by way of a male/ female peg joint that are simply pushed together.

## TECHNICAL DATA

Void Ratio	% Open	99.4
Load Bearing Capacity	Empty	140 Tonnes/M <sup>2</sup> (EN ISO 844)
-	Filled	400 Tonnes/M <sup>2</sup> (EN ISO 844)
Operating Temperature	°C	-50 to +80
Chemical Resistance	-	Resistant to Acid, Leaching, Alcohol, Oil, Petrol, Strewing Salts, Ammonia etc.
Grid-fill Mediums	NBS Sec Q23	Angular Gravel up to 10mm
-	NBS Sec Q23	Grass Seeding/ Turfing
Sub-Base Requirements	-	Inert Stabilised Material
Max Gradient	-	10%
Max Vehicle Speed	-	10
Max Carry Speed	-	20 Tonne Axle Load
Estimated Rate of Installation	M <sup>2</sup> / Hr / Person	300
Colours	-	White



✉ sales@deks.co.uk

🌐 www.deks.co.uk

☎ 01275 858 866



DEKS Industries Europe Ltd  
West End Trading Estate  
Blackfriars Road  
Nailsea, Bristol, BS48 4DJ

While every effort has been made to ensure that the details in this brochure are correct at the time of print, we cannot accept responsibility for any errors or omissions.

To find your DEKS contact on a Map please connect to our website with this QR code.



**NORTH ENGLAND  
SCOTLAND & IRELAND**

**Martin Hipkin**

BUSINESS & PRODUCT  
DEVELOPMENT DIRECTOR

[martinh@deks.co.uk](mailto:martinh@deks.co.uk)

07780 446 597

**SOUTH WEST  
& WALES**

**Mark Stewart**

BUSINESS DEVELOPMENT  
DIRECTOR

[marks@deks.co.uk](mailto:marks@deks.co.uk)

07903 389 220

**SOUTH EAST  
& HOME COUNTIES**

**Andy Minas**


BUSINESS DEVELOPMENT  
DIRECTOR


[andym@deks.co.uk](mailto:andym@deks.co.uk)

07534 294 255



 [sales@deks.co.uk](mailto:sales@deks.co.uk)

 [www.deks.co.uk](http://www.deks.co.uk)

 01275 858 866



DEKS Industries Europe Ltd  
West End Trading Estate  
Blackfriars Road  
Nailsea, Bristol, BS48 4DJ

While every effort has been made to ensure that the details in this brochure are correct at the time of print, we cannot accept responsibility for any errors or omissions.