



DEKS Perform®

Flexible roof flashing -
The future is lead free



- ✓ No scrap value to potential thieves
- ✓ Lightweight and easy to handle
- ✓ Great form stability, easily cut and dressed
- ✓ Available in 4 colours
- ✓ Use full roll without need for expansion joints


Perform[®] flexible covering - the perfect replacement for lead

Perform[®]

Perform[®] is a composite consisting of aluminium mesh, embedded in a special type of polymer rubber. Both of these materials are environmentally sound and UV resistant. The material offers the same functionality of lead, has excellent stretching properties and provides a 'breathable' covering which prevents the formation of condensation.

Much lighter than lead and non-toxic, Perform[®] meets all the demands of today's health and safety regulations.

In order to match various different coloured tiles or slates, specifiers can now choose from four different colours; grey, terracotta and black are available from stock with brown to special order.

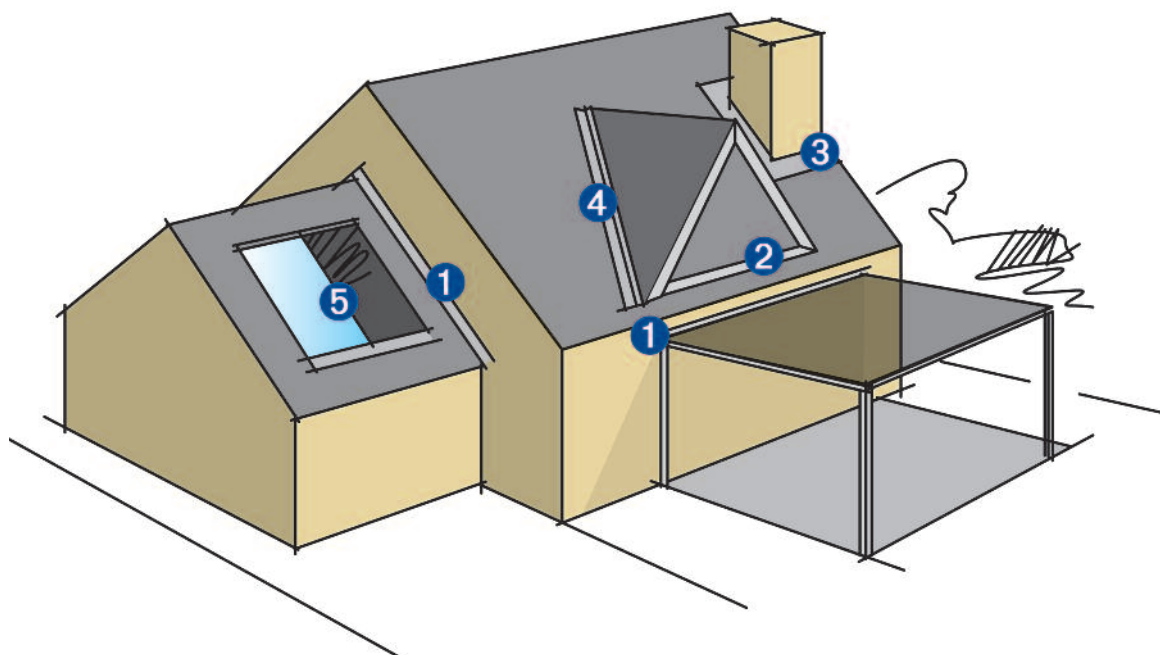

1 Exterior Walls

Perfect for flashing all types of structures including car ports, conservatories and extensions.

2 Dormers

Perform[®] is the ideal solution for flashing dormer windows and any other penetrations through traditional roofs.

3 Chimneys

Great for flashing around traditional chimney stacks on any type of profiled tile or slate roof.

4 Valley Gutters

Ideal for valley or box gutters, the full 4 metre roll of Perform[®] can be used without the need of expansion joints.

5 Solar Panels and Skylights

Perform[®] is the ideal solution for flashing solar panel fixings and around roof lights.




Perform® flexible covering Installation Instructions


1. Perform® can be applied in exactly the same way as lead, but causes no unsightly staining negating the need for patination oil. It is easily cut with tin snips or a trade knife.
2. When the material is dressed during application a Perform® dresser should be used for best results and to avoid damage to the surface of the product.
3. Perform® can be joined by either using the lock seam method or by using Perform® adhesive. In applications where lead would be traditionally welded, Perform® adhesive should be used.
4. The product will adhere to brick, concrete, metal and glass, on very porous surfaces it is recommended to treat the area with a proprietary PVA Primer.
5. If painting is required or where water is likely to travel from copper or bitumen onto Perform® use a 100% acrylic low sheen exterior paint.




Stretching ability

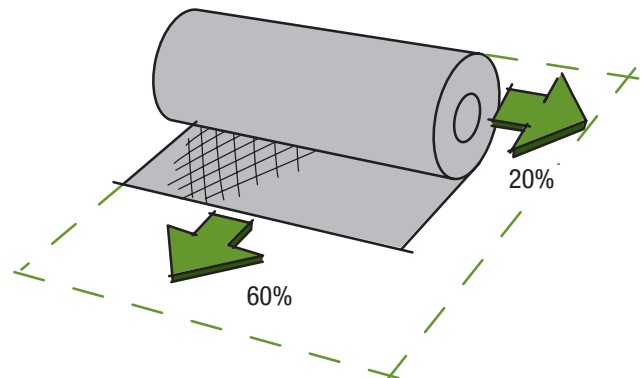

You can either fold up joints . . .

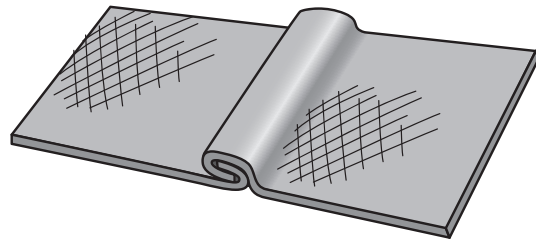

- glue them together with an overlap of 30mm as a minimum.

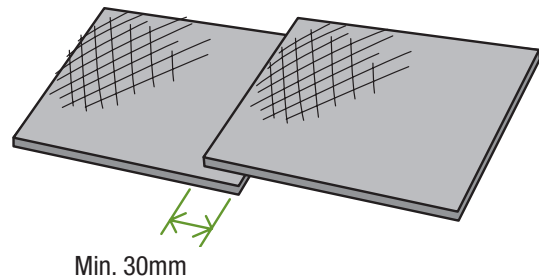

Use the dresser to protect Perform




Perform adhesive in 290ml tubes



Lead free roof sign

Perform® selection guide and price list

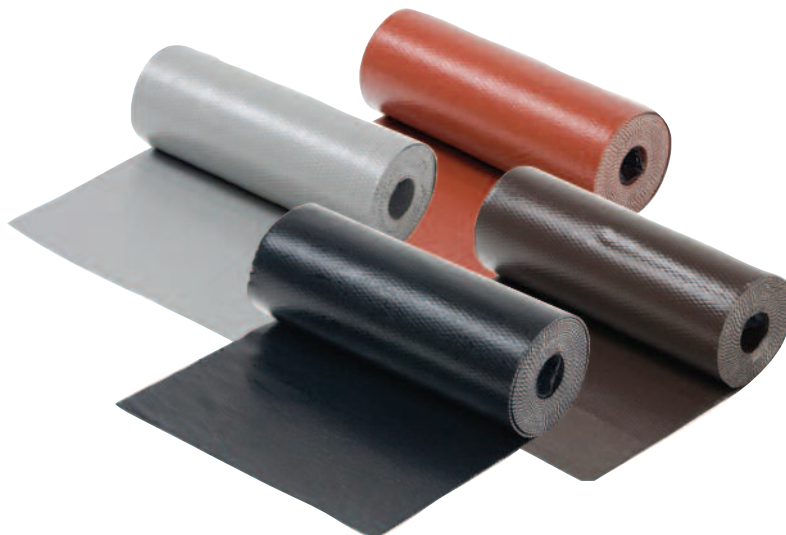

Product Code	Description	Weight	Net Price
405040015	150mm x 4m Roll - Grey	2.1kg	£28.12
405040025	250mm x 4m Roll - Grey	3.6kg	£45.63
405040030	300mm x 4m Roll - Grey	4.3kg	£56.25
405040045	450mm x 4m Roll - Grey	6.5kg	£84.37
405040060	600mm x 4m Roll - Grey	8.6kg	£112.50
405040125	1250mm x 4m Roll - Grey	18.0kg	£235.00
405140015	150mm x 4m Roll - Black	2.1kg	£28.12
405140025	250mm x 4m Roll - Black	3.6kg	£45.63
405140030	300mm x 4m Roll - Black	4.3kg	£56.25
405140045	450mm x 4m Roll - Black	6.5kg	£84.37
405140060	600mm x 4m Roll - Black	8.6kg	£112.50
405140125	1250mm x 4m Roll - Black	18.0kg	£235.00
405240015	150mm x 4m Roll - Terracotta	2.1kg	£28.12 *
405240025	250mm x 4m Roll - Terracotta	3.6kg	£45.63 *
405240030	300mm x 4m Roll - Terracotta	4.3kg	£56.25 *
405240045	450mm x 4m Roll - Terracotta	6.5kg	£84.37 *
405240060	600mm x 4m Roll - Terracotta	8.6kg	£112.50 *
405240125	1250mm x 4m Roll - Terracotta	18.0kg	£235.00 *
408058000	Perform Hammer	0.5kg	£32.10
408059532	Perform Adhesive	-	£6.05
408060000	Lead Free Roof Sign	-	£6.20

* Brown & Terracotta available to special order only

October 2014 PL-PER
UK