


Dektite®

Product Price Guide

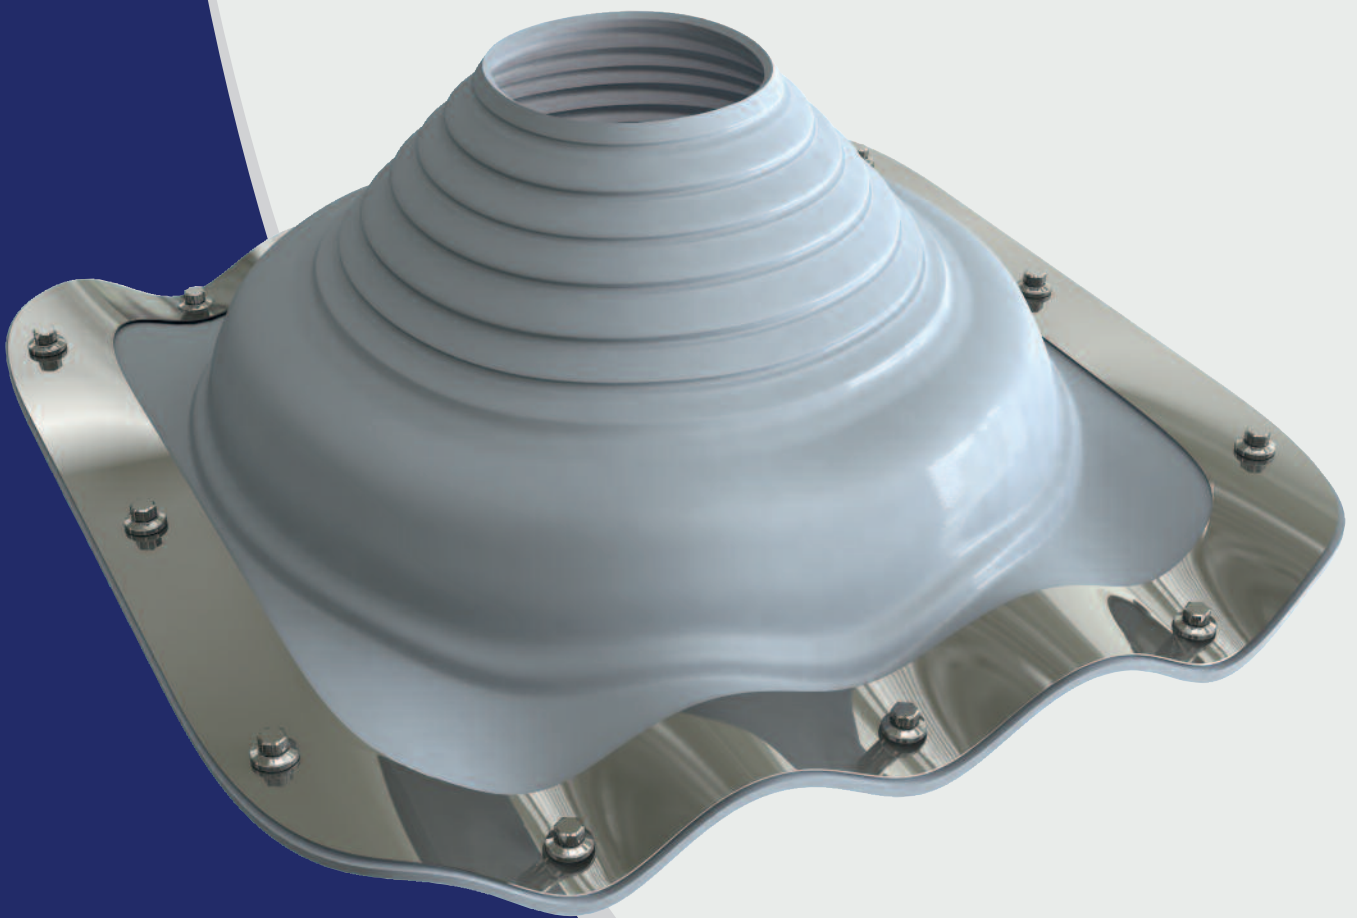

DEKS
EASY TO WORK WITH

Flashings for Metal Roofs



Dektite® Original

The Original watertight Flashing for Metal Roofs

The original watertight flashing for hot or cold flues and pipes on metal roofs. A tough weathertight seal and a strong flexible base.

Pipe External	Roof Pitch	Base Size Ø	Code		List Price	
			Grey EPDM	Grey EPDM	Red Silicone	Red Silicone
0-35mm	0-45°	92mm	DF100	8.14	-	-
5-65mm	0-40°	121mm	DF101	10.20	DF201	13.94
45-80mm	0-40°	156mm	DF102	13.47	DF202	19.17
5-127mm	0-40°	196mm	DF103	17.79	DF203	26.09
73-160mm	0-40°	238mm	DF104	23.01	DF204	33.85
108-190mm	0-40°	272mm	DF105	27.02	DF205	37.38
125-230mm	0-40°	318mm	DF106	32.36	DF206	48.63
150-280mm	0-40°	368mm	DF107	50.27	DF207	76.63
175-330mm	0-40°	418mm	DF108	59.93	DF208	91.10
254-483mm	0-40°	642mm	DF109	119.30	DF209	172.05



Dektite® Premium

Perfect for Flashing Pipes on Metal Roofs

The multi-application flashing in a highly durable EPDM or silicone, edged with a flexible aluminium band, flashes hot or cold flues and pipes on metal roofs. The square base fits any prepared hole on most roof profiles.



Dektite® Mini
for small penetrations

Pipe External	Roof Pitch	Base Size	Code		List Price		Code		List Price	
			Black EPDM	Black EPDM	Grey EPDM	Grey EPDM	Red Silicone	Red Silicone		
0-35mm	0-45°	100 x 100mm	DFE100B	7.35	DFE100G	8.31	DFE200RE	9.56		
5-55mm	0-45°	139 x 139mm	DFE101B	9.22	DFE101G	10.42	DFE201RE	12.66		
5-76mm	0-45°	178 x 178mm	DFE102B	12.21	DFE102G	13.80	DFE202RE	17.29		
5-127mm	0-45°	221 x 221mm	DFE103B	16.08	DFE103G	18.15	DFE203RE	23.79		
75-175mm	0-45°	280 x 280mm	DFE104B	20.80	DFE104G	23.52	DFE204RE	31.16		
100-200mm	0-45°	310 x 310mm	DFE105B	23.10	DFE105G	26.13	DFE205RE	37.49		
125-230mm	0-45°	363 x 363mm	DFE106B	25.60	DFE106G	28.94	DFE206RE	44.05		
150-300mm	0-45°	456 x 456mm	DFE107B	50.03	DFE107G	56.48	DFE207RE	70.97		
170-355mm	0-45°	496 x 496mm	DFE108B	60.09	DFE108G	67.87	DFE208RE	94.49		
230-508mm	0-45°	681 x 681mm	DFE109B	80.49	DFE109G	90.96	DFE209RE	141.79		

*For use in solar applications



Dektite® EZi-Seal™

Forget the Silicone - Just screw it down

Features a revolutionary non-absorbant and non-porous sponge gasket that seals by compression, even in wet conditions, it hugs the roof line to provide a watertight seal without the need for silicone sealant

Pipe External	Roof Pitch	Base Size	Code		List Price	
			Black EPDM	Black EPDM	Black EPDM	Black EPDM
0-35mm	0-45°	100 x 100mm	DFE100BEZ		9.33	
5-55mm	0-45°	139 x 139mm	DFE101BEZ		11.72	
5-76mm	0-45°	178 x 178mm	DFE102BEZ		15.51	
5-127mm	0-45°	221 x 221mm	DFE103BEZ		20.42	
75-175mm	0-45°	280 x 280mm	DFE104BEZ		26.43	
100-200mm	0-45°	310 x 310mm	DFE105BEZ		28.96	
125-230mm	0-45°	363 x 363mm	DFE106BEZ		30.72	
150-300mm	0-45°	456 x 456mm	DFE107BEZ		60.04	
170-355mm	0-45°	496 x 496mm	DFE108BEZ		72.20	
230-508mm	0-45°	681 x 681mm	DFE109BEZ		96.59	

Flashings for Metal Roofs



Dektite® Diverter

For Hi/Low Roof Pitches

No ponding or damming! The large base of the Dektite® Diverter dramatically reduces and diverts rain water back up that can occur on very low or high pitched roofs and deep ribbed roofing profiles. No need to cut around pipes, just quick straight lines for the square base.

Pipe External	Roof Pitch	Base Size	Code		List Price	
			Grey EPDM	Grey EPDM	Red Silicone	Red Silicone
75-155mm	0-60°	410 x 360mm	DF602	37.52	DF702	57.72
114-254mm	0-60°	485 x 460mm	DF603	63.76	DF703	93.80
254-406mm	0-60°	708 x 635mm	DF605	167.23	DF705	190.50
380-610mm	0-60°	1006 x 905mm	DF606	232.87	DF706	339.79
235-425mm	0-40°	750 x 660mm	RFS4	167.23	-	-




Dektite® Combo

Flash over or around

Use as standard Dektite®, or when retrofit is required, cut and fit around pipe and join with clips (supplied).

Pipe External	Roof Pitch	Base Size	Code		List Price		Code		List Price	
			Black EPDM	Black EPDM	Grey EPDM	Grey EPDM	Red Silicone	Red Silicone		
5 - 60mm	0-40°	139 x 139mm	DC101BC	8.98	DC101GC	10.20	DC201REC	13.94		
45 - 85mm	0-40°	177 x 177mm	DC102BC	11.85	DC102GC	13.47	DC202REC	19.17		
5 - 127mm	0-40°	218 x 218mm	DC103BC	15.65	DC103GC	17.79	DC203REC	26.09		
75 - 175mm	0-40°	285 x 285mm	DC104BC	20.25	DC104GC	23.01	DC204REC	33.15		
108 - 190mm	0-40°	365 x 365mm	DC105BC	23.77	DC105GC	27.02	DC205REC	37.38		
125 - 230mm	0-40°	365 x 365mm	DC106BC	28.48	DC106GC	32.36	DC206REC	48.63		
150 - 280mm	0-40°	454 x 454mm	DC107BC	44.25	DC107GC	50.27	DC207REC	76.63		
175 - 330mm	0-40°	454 x 454mm	DC108BC	52.74	DC108GC	59.93	DC208REC	91.04		
240 - 503mm	0-40°	685 x 685mm	DC109BC	104.98	DC109GC	119.30	DC209REC	172.05		
350 - 760mm	*	995 x 965mm	DC110BC	383.25	-	-	DC210REC	547.00		

* 350 - 500mm cut - the roof pitch is 30° maximum
500 - 760mm cut - the roof pitch is 15° maximum



Dektite® Combo Square

Specifically designed for square penetrations from 20mm - 120mm. Suitable for standard or retrofit applications.


Pipe External	Roof Pitch	Base Size	Code		List Price	
			Black EPDM	Black EPDM	Black EPDM	Black EPDM
20 - 125mm	0-45°	216 x 216mm	DCS103C			18.03



Dektite® Retrofit™

For repairs and difficult-to-access pipes


Purpose designed for flashing roof penetrations where the flashing cannot be lowered over the pipe, but needs to go around. The unique patented zip lock does not require separate clips - just clamp it together! Also available with a diverter tray.



Dektite® Retrofit™ Diverter

Pipe External	Roof Pitch	Base Size Ø	Code		List Price		Code		List Price	
			Black EPDM	Black EPDM	Grey EPDM	Grey EPDM	Red Silicone	Red Silicone		
20-70mm	0-40°	160mm	RF801B	17.44	RF801G	17.44	RF901RE	24.60		
50-185mm	0-40°	273mm	RF802B	35.09	RF802G	35.09	RF902RE	59.39		
85-255mm	0-40°	369mm	RF803B	66.52	RF803G	66.52	RF903RE	111.84		
235-425mm	0-40°	750 x 660mm	-	-	RFS4	167.23	-	-		

Flashings for Metal Roofs




Ideal for flashing square ducts and chimneys

Dekstrip® Flashing

Stretches to any shape, Seals and Stays

The unique and patented internal aluminium strip allows the forming of almost any shape to seal and waterproof. Use with butyl mastic sealant and self-drilling screws to seal pipes, ducts, skylights, chimneys, bullnose and curved roofing profiles.



Great for large round pipes



Excellent for curved profiles

Width	Length	Code	List Price
		Grey TPE	Grey TPE
180mm	23m	DS23-180	566.77
235mm	10m	DS10-235	288.62
305mm	10m	DS10-305	342.43
450mm	15m	DS15-450	519.54
235mm	3m	DS3-235	98.24



Dektite® fixing kits

Dektite® fixing kits are designed for use with Deks EPDM and Silicone flashings on metal roofs. The DFK1 kit (As shown) contains 1 x 75ml tube of low modulus Silicone, 25 x self-drilling screws, 25 x colour caps (silver) 1 x fixing instruction leaflet.

The DFK2 kit contains 3 x 75ml tube of low modulus silicone, 75 x self-drilling screws, 75 x colour caps (silver) and 1 x fixing instruction leaflet.

On the back page of the instruction leaflet is a table which indicates which kit is required for each size of flashing.

Code	List Price
DFK 1	14.16
DFK 2	27.15



Dektite® flashing adhesive

Dektite® flashing adhesive is a one part Polymer hybrid engineering grade adhesive with primerless adhesion to most substrates and is formulated to adhere Dektite® EPDM & Silicone flashings. The adhesive reacts to atmospheric moisture to produce a long life polymer hybrid rubber joint that is resistant to UV and will remain permanently flexible.

Temperature range: -50°C to +165°C

Code	List Price
DFA050RE-2	13.50

Flashings for Flat Membrane and Bitumen Roofs



FlatSeal™

Ideal for Flat and Low pitch Roofs with Single Ply or Bitumen Coverings

No special tools or fittings are needed - FlatSeal™ EPDM snaps tight to pipe without clips. Seals to roof with hot or cold liquid bitumen - refer to FlatSeal™ brochure for installation guide. Black EPDM for maximum UV and Ozone resistance.

Pipe External	Base Size Ø	Code	List Price
		Black EPDM	Black EPDM
25 - 175mm	345mm	FS25-175	14.34

Flashings for Tile and Slate Roofs




Seldek® Aluminium

Installs in a flash on Tile or Slate Roofs

The Seldek® Aluminium won't stain or corrode roofs and gutters. The EPDM cone, which is trimmed on site to fit, is ingeniously locked to a high grade and malleable 99.9% pure aluminium base. The fast economical way to flash a tile roof.

Pipe External	Roof Pitch	Base Size	Base Type	Code	List Price
				Black EPDM	Black EPDM
12 - 70mm	0-45°	500 x 600mm	Aluminium	SDA100B	35.88
50 - 170mm	0-45°	500 x 600mm	Aluminium	SDA101B	27.23
110 - 200mm	0-45°	600 x 600mm	Aluminium	SDA102B	37.93
160 - 300mm	0-45°	764 x 764mm	Aluminium	SDA103B	72.67
300 - 450mm	0-45°	956 x 956mm	Aluminium	SDA104B	116.12




Seldek® Aluminium High Temperature

Installs in a flash on Tile or Slate Roofs

The Seldek® Aluminium won't stain or corrode roofs and gutters. The grey silicone cone will withstand constant temperatures at the roofline of 200°C and up to 250°C intermittently

Pipe External	Roof Pitch	Base Size	Base Type	Code	List Price
				Grey Silicone	Grey Silicone
110 - 200mm	0-45°	600 x 600mm	Aluminium	SDA202G	56.00
160 - 300mm	0-45°	764 x 764mm	Aluminium	SDA203G	98.82



Seldek® Aluminium Pitched

Installs in a flash on Tile or Slate Roofs

The Seldek® Aluminium won't stain or corrode roofs and gutters. The pitched design allows for a less distorted cone when fitted to steeper pitches.

Pipe External	Roof Pitch	Base Size	Base Type	Code	List Price
				Grey Silicone	Grey Silicone
150 - 280mm	20-45°	764 x 764mm	Aluminium	SDAP203G	104.80

Pipe External	Roof Pitch	Base Size	Base Type	Code	List Price
				Black EPDM	Black EPDM
150 - 280mm	20-45°	764 x 764mm	Aluminium	SDAP103B	79.95



Seldek® Nu-Lead®

No more concern about Unprotected Lead

Seldek® Nu-Lead® has been developed for use where the handling of lead and associated environmental issues are of concern. Combines a long-life, weather-resistant EPDM cone with a grey primed acrylic coated lead base. The unique thermo-baked coating does not affect the lead's malleability, and prevents leaching onto the roof and into gutters, downpipes and the water table.

Pipe External	Roof Pitch	Base Size	Base Type	Code	List Price
				Black EPDM	Black EPDM
12 - 70mm	0-45°	490 x 410mm	Nu-Lead	DNL101B	58.22
50 - 170mm	0-45°	600 x 450mm	Nu-Lead	DNL103B	77.23
175 - 330mm	0-45°	850 x 550mm	Nu-Lead	DNL108B	121.08


Solar Flashings for tile and slate roofs

SolarDek™

The speciality Flashing for solar thermal installations

The purpose designed SolarDek™ provides the safest, most efficient method of flashing solar thermal pipes and cables on tile and slate roofs.

SolarDek™ features the Nu-Lead® base which will not stain or corrode the roof, together with long-life Dektite® EPDM or grey silicone cone ideally suited to solar thermal pipe sizes.

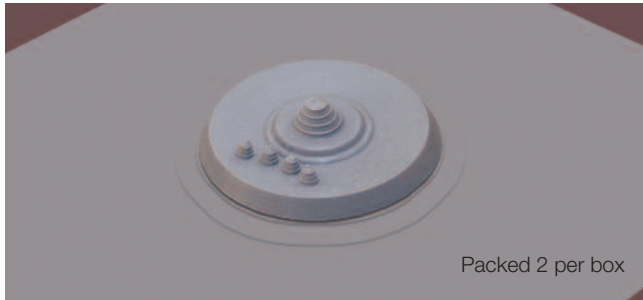

SolarDek™

- ✓ Grey high temperature seal
- ✓ Complete weather proofing for all solar thermal pipes and cables
- ✓ Safe protected Nu-Lead® apron
- ✓ Purpose made durable solution as required by MCS

Pipe External	Roof Pitch	Base Size	Base Type	Code		List Price
				Black EPDM	Black EPDM	
0 - 35mm	0-45°	490 x 410mm	Nu-Lead®	DNL100B		58.22
0 - 35mm	0-45°	450 x 600mm	Aluminium	SDA MINI		35.87

Pipe External	Roof Pitch	Base Size	Base Type	Code		List Price
				Grey Silicon	Grey Silicone	
0 - 35mm	0-45°	490 x 410mm	Nu-Lead®	DNLS200G		58.22
0 - 35mm x2	0-45°	490 x 410mm	Nu-Lead®	DNLS200MPG		66.95

Dektite®

Multicable Solar Flashing

The speciality flashing for solar PV cables on tile or slate roofs

Allows up to 10 cables to be taken effectively through any tile or slate roof - Avoids risk of damage or pressure on cables by isolating from tiles or slates and provides a complete weatherproof seal. Black EPDM cone, features Nu-Lead® acrylic coated lead base.



Dektite® Multicable

- ✓ Black EPDM High UV resistant cone
- ✓ Available with Aluminium or Nu-Lead® base
- ✓ Weather seals and protects up to 10 cables
- ✓ Purpose made durable solution as required by MCS

Cable External	Roof Pitch	Base Size	Base Type	Code		List Price
				Black EPDM	Black EPDM	
4 - 8mm	Any	490 x 410mm	Nu-Lead®	DNLS10MB		58.22
4 - 8mm	Any	450 x 600mm	Aluminium	SDA10MB		38.58

Solar Flashings for metal roofs

Dektite® Premium

Perfect for Flashing Pipes and Cables on Metal Roofs

The multi-application flashing in a highly durable EPDM or silicone, edged with a flexible aluminium band, flashes pipes and cables on metal roofs. The square base fits most roof profiles.



Dektite® Premium DFE 100/200

- ✓ For solar pipe or up to 3 cables
- ✓ Suits most roof profiles
- ✓ Available in black and grey EPDM or red silicone

Dektite® Premium DFE 101/201


- ✓ Versatile flashing, accommodates up to 5 penetrations
- ✓ Suitable for pipes and/or cables
- ✓ High UV resistance

Dektite® Premium Multicable DFE 101BM


- ✓ Protects up to 12 cables and weatherproofs entry to any metal roof
- ✓ Purpose made durable solution as required by MCS
- ✓ Suits most roof profiles

				Code	List Price	Code	List Price	Code	Code
Pipe External	Cable External	Roof Pitch	Base Size	Red Silicone	Red Silicone	Grey EPDM	Grey EPDM	Black EPDM	Black EPDM
0-35mm	4-8mm	0-45°	100 x 100mm	DFE200RES	10.04	DFE100GS	8.72	DFE100BS	7.72
5-55mm	4-8mm	0-45°	139 x 139mm	DFE201RES	13.30	DFE101GS	10.93	DFE101BS	9.67
N/A	4-8mm	Any	139 x 139mm	N/A	N/A	N/A	N/A	DFE101BM	10.99


Dektite® installation instructions




1 Cut Dektite® cone where indicated for the relevant pipe size




2 Slide Dektite® flashing down over pipe. Water can be used as a lubricant




3 Apply neutral cure silicone sealant on underside of flange




4 Press pipe flashing into contours of roof panel




5 Fasten flashing to surface with self-tapping or self drilling screws; or selected pop rivets




* Use a Dektite® on the 'diamond' or bias for enlarged holes and penetrations on steep pitched roofs or deep contours

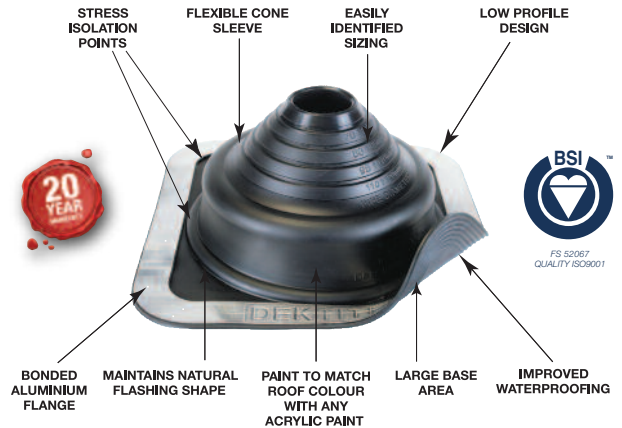


Seldek® installation instructions




1 Read down the cone to determine the correct cutting ring for the pipe diameter, and trim the cone to suit using sharp tin snips or scissors.



2 Slide down pipe using water as a lubricant. NB. Apply pressure to the cone only, do not pull down using the flashing base




3 Place upper edge of base under tiles, form an anti-capillary fold where necessary.



4 Hand dress the apron for a professional finish. Where the flashing is used with any product which has a projecting seam use silicone sealant at the point where the seam penetrates the top of the flashing.

Installation of flashings with cable nipples

The cable passage nipples are the same on each of the different solar flashings. Sharp tin snips or scissors must be used to ensure a neat, parallel cut at the desired position on the nipple. Do not use any sharp instruments, or any other tool including craft knives, to puncture a hole.

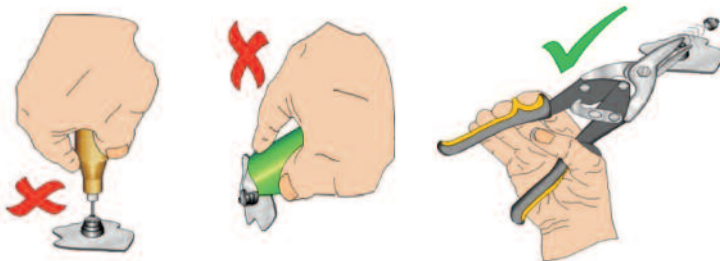

The following flashings have cable nipples

Dektite Flashings for solar pipes and cables	
Metal Roofs	Tile and Slate roofs
DFE 100 BS	DNL100B
DFE 100 GS	DNL200G
DFE 200 RES	SDA MINI
DFE 101 BS	DNLS10MB
DFE 101 GS	SDA10MB
DFE 201 RES	